

568B	Pin out	568B
white-orange	1	1 white-orange
orange	2	2 orange
white-green	3	3 white-green
green	6	6 green
blue	4	4 blue
white-blue	5	5 white-blue
white brown	7	7 white brown
brown	8	8 brown
shell		shell

Fig3

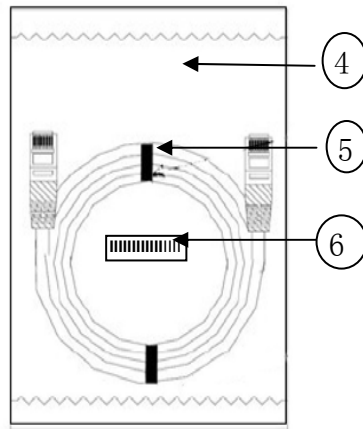


Fig 4

**Wirewin**<sup>®</sup>  
European Cabling Solutions



1: Electrical test

- 1.1 100% short and open test, miss wire test
- 1.2 Insulation resistance: DV 300V 500M Ohm Min
- 1.3 TIA/EIA Channel test by Fluke tester, random test, 100Mhz ,
- 1.4 568B-568B pin out

2: All material are RoHS compliant

3: print: as per customer's request except illegal request

Part No	Name	Specification	Qty
1	Cable	F/UTP Cat5 4pair, Cu 26AWG 7*0.15mm, Anti-UV PVCjacket, OD 5.2+/- 0.2	
2	Connector	8P8C RJ45 plug, 3u"gold plated Pins, shielded	2
3	Boot	6# mould type	2
4	Polybag	WIREWIN bag,	1
5	cable tie	same color cable tie	2
6	Label	black print, white background	1

			
Product	F/UTP CAT5E 26AWG CU outdoor PATCH CORD		
Part No	PKW-OUT-K5E	ICON	Toerance
Drawn by			x. +/- 1.00
Checked by			X.X +/- 0.50
Approved by			Scale mm
Version	A	Date	20141212