

MAST AMPLIFIERS WITH SAT-IF COUPLING AM 303 L2 / AM 263 L2

Excellent gain / output level ratio

Low noise

Wide power voltage margin


ABS plastic case, IP 23, with self-supporting lid and closure for coaxial cables

Swivel amplifier for easy connection.



REFERENCIA	AM 303 L2			AM 263 L2			
Código	051029			051028			
Entradas	VHF	UHF	SAT	LOG (VHF+UHF)	UHF	SAT	
Rango de frecuencias	MHz	47-230	470-694	950-2200	47-230 + 470-694	470-694	950-2200
Ganancia	dB	20	30	-2	20/26	26	-2
Regulación	dB	15	15	-	15/15	15	-
Nivel de salida (DIN 45004B)	dBμV	107	107	-	107/107	107	-
Figura de ruido	dB	<3	<2	-	<3,5/<6	<6	-
Tensión de alimentación	Vdc	12-24			12-24		
Paso de corriente		-	-	300	-	-	300
Consumo de corriente	mA	≤ 75			≤ 75		

Terrestrial / Satellite (single cable) installation

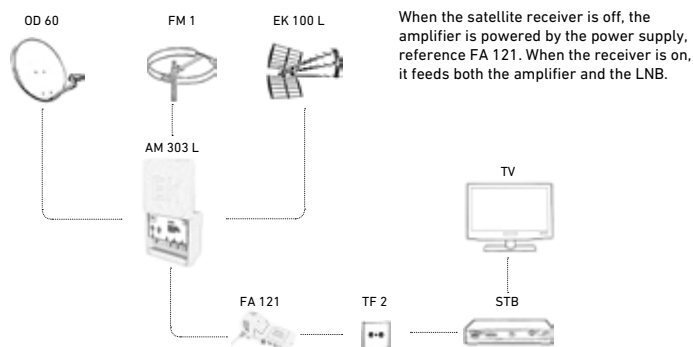

LINEAR POWER SUPPLY FA 121

Operation indicator LED

Specially designed for supplying mast amplifiers with IF mix

REFERENCE	FA 121	FA 12 MINI
Code	052002	052005
Outputs	N.	1
Frequency range	MHz	47-2150
Insertion loss	dB	<1
Output Voltage	Vdc	12 / 13 - 18
Max. Current output	mA	200
Mains Voltage	Vac	230 ±10%
Connector type	-	F



FA 121



FA 12 MINI